

ACCESSORIES

AAFTO12


Thermostat

Extremely compact thermostat with quick snap-in installation and a wide adjustment range. It has a normally open contact and used mainly to control the fans, heat exchangers or as a maximum temperature signal.



Characteristics	M.U.	AAFTO12
Setting range	°C	0-60
Switch difference	K	7
Contact	-	NO
Switching capacity (resistive load)	A	10
Max. tension	V	250 AC
Dimensions HxWxD	mm	60x33x35
Sensor element	-	Bimetal
Electrical connection	-	2-pole terminal(2,5 mm ²)
Operating temperature limits	°C	-45 +70
Protection level EN60529	-	IP20
Mounting on clip for DIN bar	mm	35
Weight	g	40
Conformity	-	CE

Accessories/Options		
Pack of 5 devices installation accessories for electric enclosures	-	AAWFT10

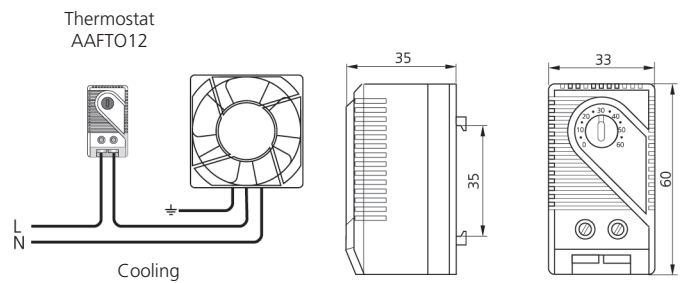

AAWTC10

Thermostat

Extremely compact thermostat with quick snap-in installation and a wide adjustment range. It has a normally closed contact and used mainly to control the anti-condensate heaters.



Characteristics	M.U.	AAWTC10
Setting range	°C	0-60
Switch difference	K	7
Contact	-	NC
Switching capacity (resistive load)	A	10
Max. tension	V	250 AC
Dimensions HxWxD	mm	60x33x35
Sensor element	-	Bimetal
Electrical connection	-	2-pole terminal(2,5 mm ²)
Operating temperature limits	°C	-45 +70
Protection level EN60529	-	IP20
Mounting on clip for DIN bar	mm	35
Weight	g	40
Conformity	-	CE

Accessories/Options		
Pack of 5 devices installation accessories for electric enclosures	-	AAWFT10

