

ACCESSORIES






AAWTS10

Thermostat

Thermostat with high current capacity exchange contact.

Characteristics	M.U.	AAWTS10
Setting range	°C	0-60
Switch difference	K	4,0
Contact	-	Change-over
Switching capacity (resistive load)	A	10
Max. tension	V	240 AC
Dimensions HxWxD	mm	64x38x51
Sensor element	-	Bimetal
Electrical connection	-	3-pole terminal (2,5 mm ²)
Operating temperature limits	°C	-20 +80
Protection level EN60529	-	IP20
Mounting on clip for DIN bar	mm	35
Weight	g	50
Conformity	-	CE

Accessories/Options		
Pack of 5 devices installation accessories for electric enclosures	-	AAWFT10

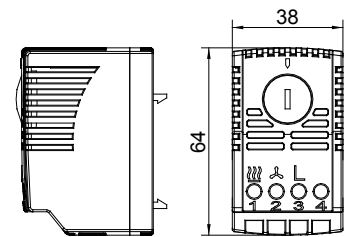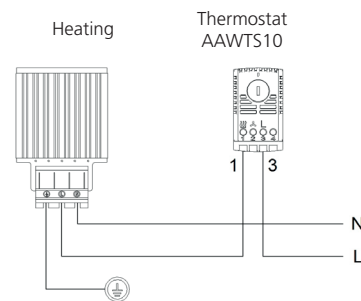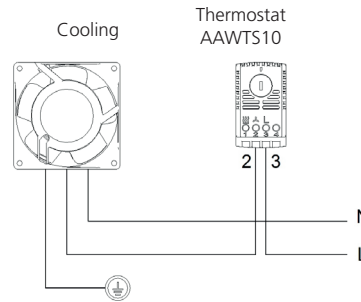

AAWHS10

Humidistat

Humidistat that puts a stop to condensate forming which would otherwise damage the inside of the enclosure. It is used to control the anti-condensate heaters or dehumidifiers. It features a high switch power change-over contact.

Characteristics	M.U.	AAWHS10
Operating temperature limits	°C	0-60
Setting range	%RH	35-95
Switch difference at 50% RH	%RH	4
Contact	-	Change-over
Switching capacity (resistive load)	A	5
Max. tension	V	250 AC
Dimensions HxWxD	mm	67x50x38
Permissible air velocity	m/s	15
Electrical connection	-	3-pole terminal (2,5 mm ²)
Storage temperature limits	°C	-20 +80
Protection level EN60529	-	IP20
Mounting on clip for DIN bar	mm	35
Weight	g	60
Conformity	-	CE

Accessories/Options		
Pack of 5 devices installation accessories for electric enclosures	-	AAWFT10

LOAD 2 = enclosure heating
LOAD 3 = humidifier

