



# BLU10

Air-water heat exchangers for door or wall installation

## COOLING CAPACITY

1000 W

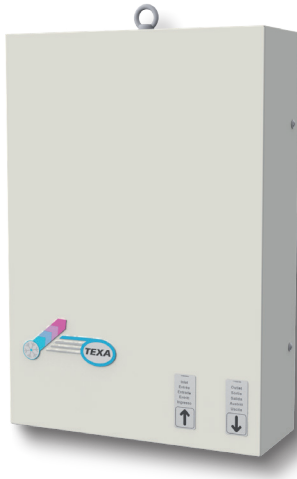


Features	UoM	BLU10BX0B	BLU10BXUB	BLU10CX0B
Cooling capacity - W10A35	W	1000	1000	1000
Water flow rate	l/h	150	150	150
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	115 1~ 50-60
Width	mm	311	311	311
Height	mm	453	453	453
Depth	mm	115	115	115
Max current	A	0.17	0.20	0.38
T Fuse	A	2	2	2
Power draw - W10A35	W	29	34	25
Operating cycle	-	100%	100%	100%
Electrical connection		Cable L = 3 m	Cable L = 3 m	Cable L = 3 m
Type of Refrigerant	-	Water	Water	Water
Max refrigeration circuit pressure	bar	10	10	10
Water connection	-	3/8"G	3/8"G	3/8"G
Air flow rate	m <sup>3</sup> /h	330	330	330
Internal temperature range	°C	20-60	20-60	20-60
External temperature range	°C	1-70	1-60	1-70
IP rating EN60529	-	IP55	IP55	IP55
Noise level	dB (A)	55	55	55
Weight	kg	12	12	12
Colour	-	RAL 7035 embossed effect		
Conformity	-	CE	CE 	CE

### Accessories

Thermostat 20-46°C, gas bulb 15A	C16000002
Solenoid valve, NC	C15000777
Level indicator, NO	C16000140
External stainless-steel framework	
Coating in non-standard colour	

## Performance

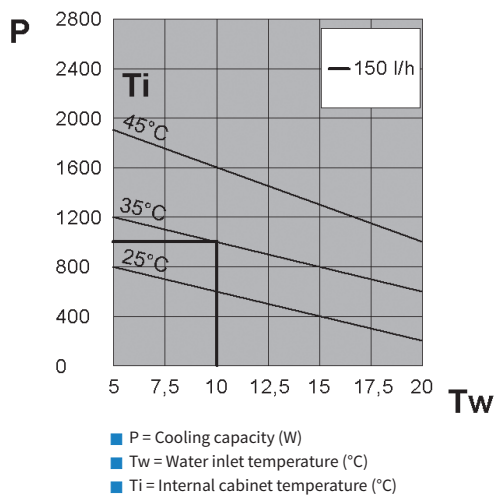

## Dimensions

