


# DEK15


Roof-mount air conditioners

COOLING CAPACITY


1550 W

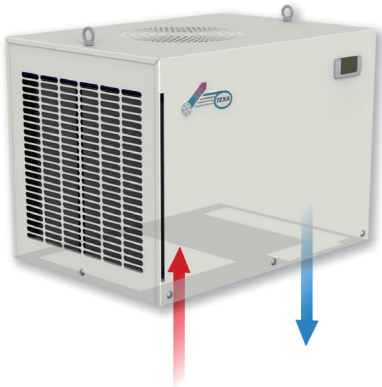


## Performance

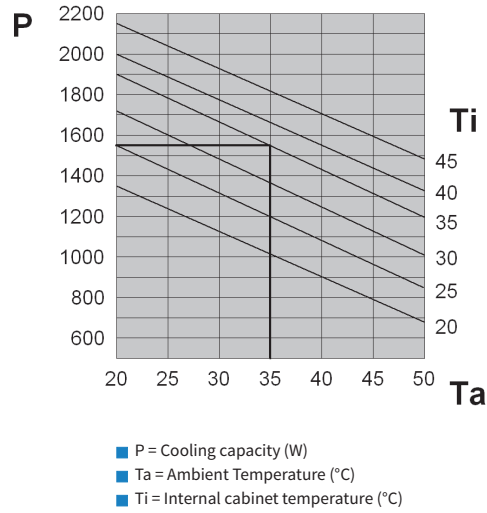

## Dimensions

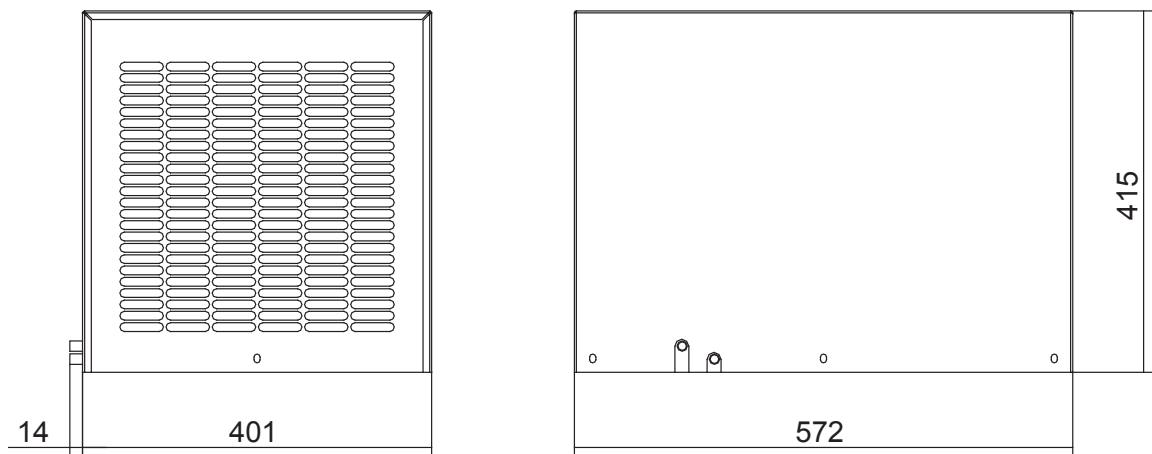

Features	UoM	DEK15BT0B	DEK15BTUB	DEK15CT0B	DEK15GT0B
Cooling capacity EN14511 - A35A35	W	1550	1550	1550	1550
Cooling capacity EN14511 - A35A50	W	1200	1200	1200	1200
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	115 1~ 50-60	400/440 2~ 50-60
Width	mm	401	401	401	401
Height	mm	415	415	415	415
Depth	mm	572	572	572	572
Max current	A	4.5	5.5	10	2.8
Inrush current	A	18	18	39	9.6
T Fuse	A	8	10	16	4
Power draw EN14511 - A35A35	W	810	830	820	820
Power draw EN14511 -A35A50	W	930	960	940	940
Operating cycle	-	100%	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.54	0.41	0.54	0.54
Max refrigeration circuit pressure	bar	25	28	25	25
External air fan capacity	m <sup>3</sup> /h	1820	1820	1820	1820
Cabinet air fan capacity	m <sup>3</sup> /h	860	860	860	860
Internal temperature range	°C	20-50	20-50	20-50	20-50
Temperature regulation	-	Electronic thermostat factory set to 35°C			
External temperature range	°C	20-55*	20-50	20-50	20-50
EN60529 ingress protection - cabinet side	-	IP54	IP54	IP54	IP54
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34	IP34
Noise level	dB (A)	65	65	65	65
Weight	kg	44	44	46	46
Colour	-	RAL 7035 embossed effect			
Conformity	-	CE	CE  US	CE	CE

\* 50 °C at 60 Hz

Accessories	
Pack of 5 fabric air filters	AADFP12
Pack of 1 metal air filter	AADFM12
Condensate level indicator	C16000140
External stainless-steel framework	
Coating in non-standard colour	