


DEK30

Roof-mount air conditioners

COOLING CAPACITY


2900 W

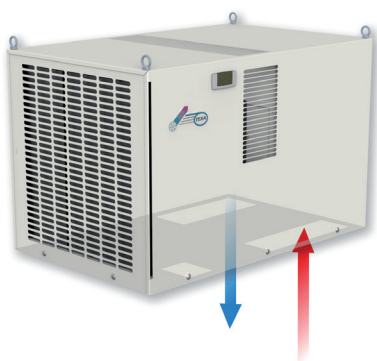

Features	UoM	DEK30BT0B	DEK30LT0B	DEK30NTUB
Cooling capacity EN14511 - A35A35	W	2900	2900	2900
Cooling capacity EN14511 - A35A50	W	2250	2250	2250
Power supply	V ~ Hz	230 1~ 50-60	400 3~ 50-60	460 3~ 60
Width	mm	492	492	492
Height	mm	496	496	496
Depth	mm	784	784	784
Max current	A	8.2	2.5	3.3
Inrush current	A	38.4	15.7	15.7
T Fuse	A	16	6	6
Power draw EN14511 - A35A35	W	1350	1210	1310
Power draw EN14511 - A35A50	W	1610	1450	1750
Operating cycle	-	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	1.26	1.2	1.2
Max refrigeration circuit pressure	bar	25	25	28
External air fan capacity	m ³ /h	3410	3410	3410
Cabinet air fan capacity	m ³ /h	860	860	860
Internal temperature range	°C	20-50	20-50	20-50
Temperature regulation	-	Electronic thermostat, factory set to 35°C		
External temperature range	°C	20-50	20-50	20-50
EN60529 ingress protection - cabinet side	-	IP54	IP54	IP54
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34
Noise level	dB (A)	75	75	75
Weight	kg	80	83	83
Colour	-	RAL 7035 embossed effect		
Conformity	-	CE	CE	CE

Accessories	
Pack of 5 fabric air filters	AADFP30
Pack of 1 metal air filter	AADFM30
Condensate level indicator	C16000140
External stainless-steel framework	
Coating in non-standard colour	

Performance

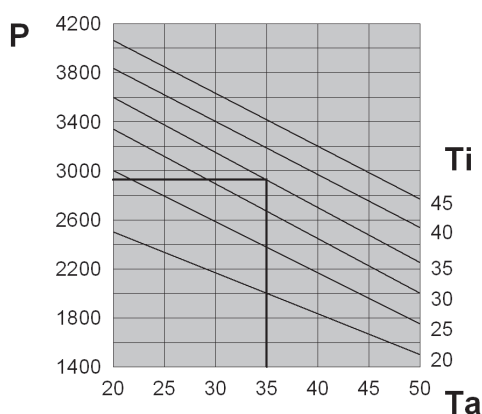

- P = Cooling capacity (W)
- Ta = Ambient Temperature (°C)
- Ti = Internal cabinet temperature (°C)

Dimensions

