

EMO60

Wall-mount air conditioners for outdoor applications

COOLING CAPACITY

5800 - 6050 W




Accessories	
Pack of 5 fabric air filters	C15000175
Pack of 1 metal air filter	C15000176
External stainless-steel framework	
Coating in non-standard colour	
48VDC evaporator fan	
Anti-tamper screw kit	
High temperature alarm	
Pressure alarms (low, high)	

Features	UoM	EMO60MMEB	EMO60NMEB
Cooling capacity EN14511 - A35A35	W	5800	6050
Cooling capacity EN14511 - A35A50	W	4350	4530
Power supply	V ~ Hz	400 3~ 50	460 3~ 60
Width	mm	600	600
Height	mm	2000	2000
Depth	mm	387	387
Max current	A	5.9	6.8
Inrush current	A	21.7	23.5
T Fuse	A	8	8
Power draw EN14511 - A35A35	W	2340	2920
Power draw EN14511 - A35A50	W	3880	4520
Operating cycle	-	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m
R407C Refrigerant	kg	1.8	1.8
Max refrigeration circuit pressure	bar	27	27
External air fan capacity	m ³ /h	2900	2900
Cabinet air fan capacity	m ³ /h	1450	1450
Internal temperature range	°C	+20 - +46	+20 - +46
Temperature regulation	-	Electromechanical thermostat, factory set to 35°C	
External temperature range	°C	-20 - +50	-20 - +50
EN60529 ingress protection - cabinet side	-	IP54	IP54
EN60529 ingress protection - ambient side	-	IP34*	IP34*
Noise level	dB (A)	72	72
Weight	kg	150	150
Colour	-	RAL 7035 embossed effect	
Conformity	-	CE	CE

* IP54 rated exterior electrical connections

Performance (EMO60MMEB)

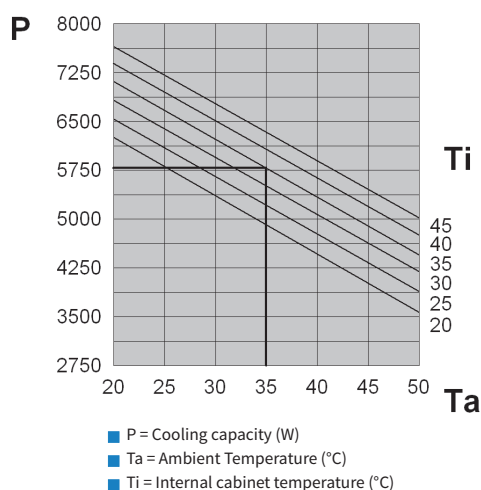

Dimensions

