

EMOA0

Wall-mount air conditioners for outdoor applications

COOLING CAPACITY

9400 - 9850 W




Features	UoM	EMOA0MMEB	EMOA0NMEB
Cooling capacity EN14511 - A35A35	W	9400	9850
Cooling capacity EN14511 - A35A50	W	7000	7350
Power supply	V ~ Hz	400 3~ 50	460 3~ 60
Width	mm	800	800
Height	mm	2000	2000
Depth	mm	387	387
Max current	A	9.1	10.3
Inrush current	A	30.7	32.5
T Fuse	A	18	18
Power draw EN14511 - A35A35	W	3650	4380
Power draw EN14511 - A35A50	W	5400	6340
Operating cycle	-	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m
R134a Refrigerant	kg	2.3	2.3
Max refrigeration circuit pressure	bar	27	27
External air fan capacity	m ³ /h	2900	2900
Cabinet air fan capacity	m ³ /h	2900	2900
Internal temperature range	°C	+20 - +46	+20 - +46
Temperature regulation	-	Electromechanical thermostat, factory set to 35°C	
External temperature range	°C	-20 - +50	-20 - +50
EN60529 ingress protection - cabinet side	-	IP54	IP54
EN60529 ingress protection - ambient side	-	IP34*	IP34*
Noise level	dB (A)	77	77
Weight	kg	180	180
Colour	-	RAL 7035 embossed effect	
Conformity	-	CE	CE

Accessories	
Pack of 5 fabric air filters	C15000188
Pack of 1 metal air filter	C15000189
External stainless-steel framework	
Coating in non-standard colour	
48VDC evaporator fan	
Anti-tamper screw kit	
High temperature alarm	
Pressure alarms (low, high)	

* IP54 rated exterior electrical connections

Performance (EMOA0MMEB)

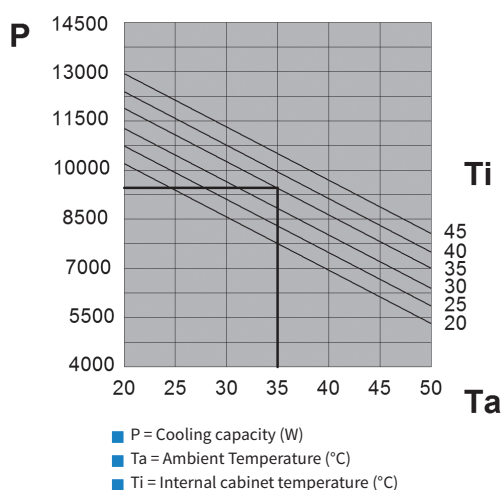

Dimensions

