

FLY15


Door- or wall-mount air conditioners

COOLING CAPACITY


1500 W



Performance

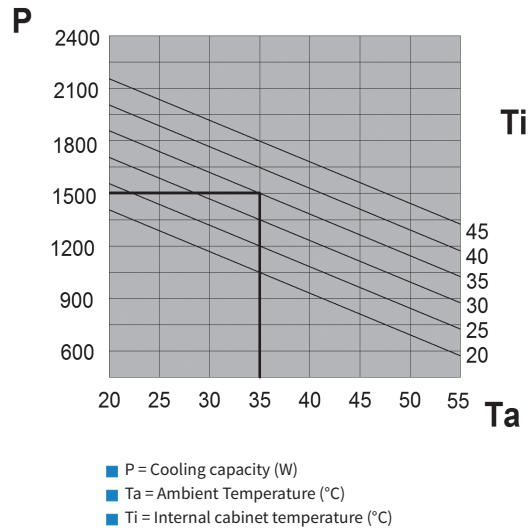

Dimensions

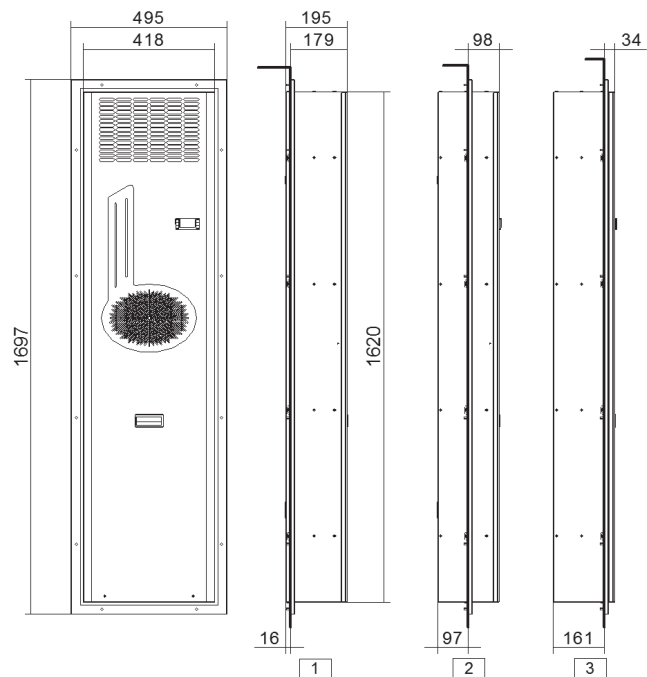

Features	UoM	FLY15BT0B	FLY15BTUB	FLY15KT0B	FLY15KTUB
Cooling capacity EN14511 - A35A35	W	1500	1500	1500	1500
Cooling capacity EN14511 - A35A50	W	1150	1150	1150	1150
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	400/460 2~ 50-60	400/460 2~ 50-60
Width	mm	495	495	495	495
Height	mm	1697	1697	1697	1697
Depth	mm	195	195	195	195
Max current	A	6.3	6.3	3.5	3.5
Inrush current	A	24	24	10.5	10.5
T Fuse	A	10	10	6	6
Power draw EN14511 - A35A35	W	1020	1020	1020	1020
Power draw EN14511 -A35A50	W	1290	1290	1290	1290
Operating cycle	-	100%	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.41	0.41	0.41	0.41
Max refrigeration circuit pressure	bar	28	28	28	28
External air fan capacity	m ³ /h	1050	1050	1050	1050
Cabinet air fan capacity	m ³ /h	860	860	860	860
Internal temperature range	°C	20-50	20-50	20-50	20-50
Temperature regulation	-	Electronic thermostat, factory set to 35°C			
External temperature range	°C	20-55	20-55	20-55	20-55
EN60529 ingress protection - cabinet side	-	IP55	IP55	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34	IP34
Noise level	dB (A)	66	66	66	66
Weight	kg	59	59	61	61
Colour	-	RAL 7035 embossed effect			
Conformity	-	CE	CE cRU _{US}	CE	CE cRU _{US}

Accessories	
Pack of 5 fabric air filters	C15000181
Pack of 1 metal air filter	C15000182
External stainless-steel framework	
Coating in non-standard colour	