


# MIX22

Air-air heat exchangers

SPECIFIC COOLING POWER

22 W/K

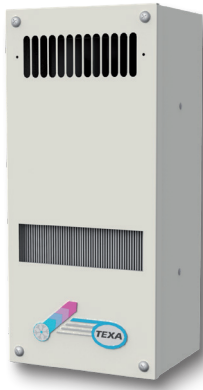


Features	UoM	MIX22BX0B	MIX22CX0B
Specific cooling power	W/K	22	22
Power supply	V ~ Hz	230 1~ 50-60	115 1~ 50-60
Width	mm	189	189
Height	mm	413	413
Depth	mm	149	149
Max current	A	0.5	0.96
T Fuse	A	1	2
Power draw	W	72	80
Operating cycle	-	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m
External air fan capacity	m <sup>3</sup> /h	280	280
Cabinet air fan capacity	m <sup>3</sup> /h	280	280
Temperature limits	°C	-5+55	-5+55
EN60529 ingress protection - cabinet side	-	IP54	IP54
Noise level	dB (A)	59	60
Weight	kg	7	7
Colour	-	RAL 7035 embossed effect	
Conformity	-	CE	CE

#### Accessories

Thermostat 0-60°C, normally open, 10A	AAFTO12
Thermostat 5-60°C, change-over contact, 10A	AAWTS10
External stainless-steel framework	
Coating in non-standard colour	

#### Performance

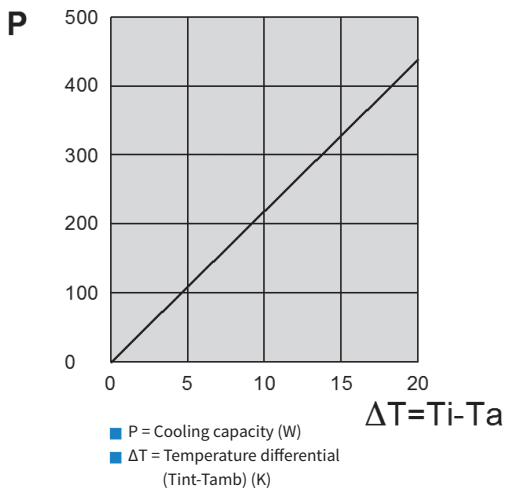

#### Dimensions

