


MIX80

Air-air heat exchangers

SPECIFIC COOLING POWER

80 W/K

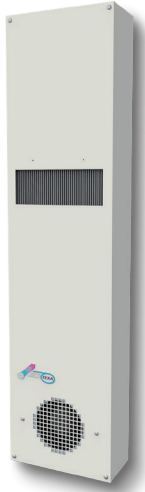


Features	UoM	MIX80BX0B	MIX80CX0B
Specific cooling power	W/K	80	80
Power supply	V ~ Hz	230 1~ 50-60	115 1~ 50-60
Width	mm	317	317
Height	mm	1260	1260
Depth	mm	148	148
Max current	A	1.06	2.1
T Fuse	A	2	4
Power draw	W	240	255
Operating cycle	-	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m
External air fan capacity	m ³ /h	1050	1050
Cabinet air fan capacity	m ³ /h	1050	1050
Temperature limits	°C	-5+55	-5+55
EN60529 ingress protection - cabinet side	-	IP54	IP54
Noise level	dB (A)	75	75
Weight	kg	17	17
Colour	-	RAL 7035 embossed effect	
Conformity	-	CE	CE

Accessories

Thermostat 0-60°C, normally open, 10A	AAFTO12
Thermostat 5-60°C, change-over contact, 10A	AAWTS10
External stainless-steel framework	
Coating in non-standard colour	

Performance

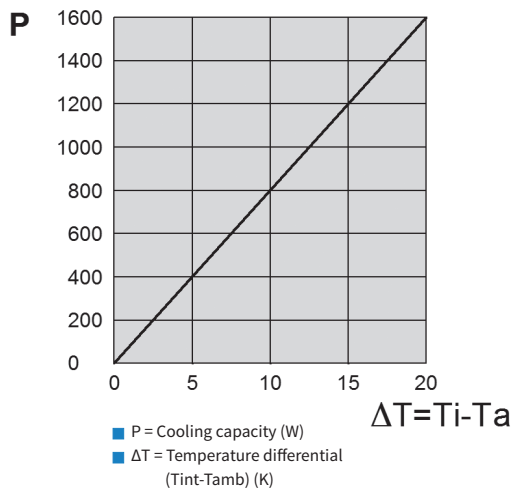

Dimensions

