

# SKY10

Door- or wall-mount air conditioners

## COOLING CAPACITY

1050 W




Features	UoM	SKY10BTOB	SKY10CT0B	SKY10GT0B
Cooling capacity EN14511 - A35A35	W	1050	1050	1050
Cooling capacity EN14511 - A35A50	W	860	860	860
Power supply	V ~ Hz	230 1~ 50-60	115 1~ 50-60	400/440 2~ 50-60
Width	mm	400	400	400
Height	mm	950	950	950
Depth	mm	233	233	233
Max current	A	3.1	6.3	1.9
Inrush current	A	10.5	23	8
T Fuse	A	6	10	4
Power draw EN14511 - A35A35	W	570	590	590
Power draw EN14511 - A35A50	W	650	670	670
Operating cycle	-	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.3	0.3	0.3
Max refrigeration circuit pressure	bar	25	25	25
External air fan capacity	m <sup>3</sup> /h	860	860	860
Cabinet air fan capacity	m <sup>3</sup> /h	570	570	570
Internal temperature range	°C	20-46	20-46	20-46
Temperature regulation	-	Electronic thermostat, factory set to 35°C		
External temperature range	°C	20-55*	20-50	20-50
EN60529 ingress protection - cabinet side	-	IP54	IP54	IP54
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34
Noise level	dB (A)	65	65	65
Weight	kg	37	39	39
Colour	-	RAL 7035 embossed effect		
Conformity	-	CE	CE	CE

\* 50 °C at 60 Hz

Accessories	
Pack of 5 fabric air filters	C15000181
Pack of 1 metal air filter	C15000182
External stainless-steel framework	
Coating in non-standard colour	

## Performance

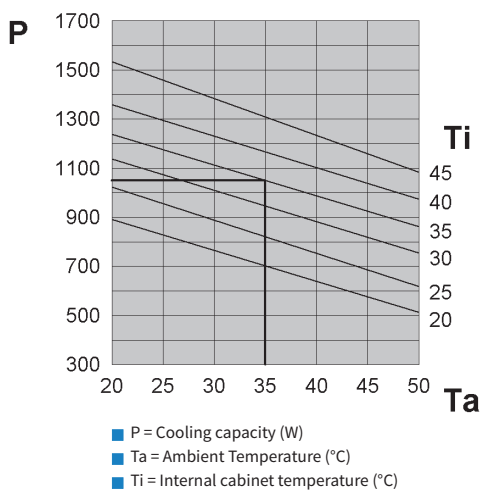

## Dimensions

