


SKY20

Door- or wall-mount air conditioners

COOLING CAPACITY

2050 W

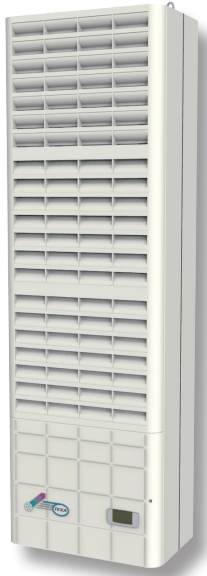


Features	UoM	SKY20BT0B	SKY20CT0B	SKY20LT0B
Cooling capacity EN14511 - A35A35	W	2050	2050	2050
Cooling capacity EN14511 - A35A50	W	1560	1560	1560
Power supply	V ~ Hz	230 1~ 50-60	115 1~ 50-60	400 3~ 50-60
Width	mm	400	400	400
Height	mm	1265	1265	1265
Depth	mm	236	236	236
Max current	A	6.5	13.3	2.5
Inrush current	A	24	48	10
T Fuse	A	10	20	6
Power draw EN14511 - A35A35	W	1080	1110	970
Power draw EN14511 - A35A50	W	1290	1310	1150
Operating cycle	-	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.60	0.60	0.75
Max refrigeration circuit pressure	bar	25	25	25
External air fan capacity	m ³ /h	1050	1050	1050
Cabinet air fan capacity	m ³ /h	860	860	860
Internal temperature range	°C	20-46	20-46	20-46
Temperature regulation	-	Electronic thermostat, factory set to 35°C		
External temperature range	°C	20-55*	20-50	20-50
EN60529 ingress protection - cabinet side	-	IP54	IP54	IP54
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34
Noise level	dB (A)	65	65	65
Weight	kg	60	67	62
Colour	-	RAL 7035 embossed effect		
Conformity	-	CE	CE	CE

* 50 °C at 60 Hz

Accessories	
Pack of 5 fabric air filters	C15000181
Pack of 1 metal air filter	C15000182
External stainless-steel framework	
Coating in non-standard colour	

Performance

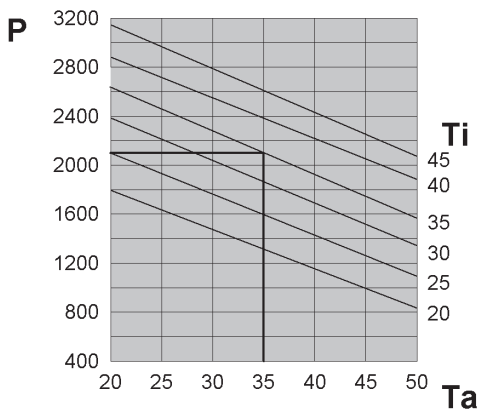

- P = Cooling capacity (W)
- Ta = Ambient Temperature (°C)
- Ti = Internal cabinet temperature (°C)

Dimensions

