

# EMOA0 Outdoor cooling units for door or wall mounting


Characteristics	M.U.	EMOA0MMEB	EMOA0NMEB
Cooling capacity EN14511 - A35A35	W	9400	9850
Cooling capacity EN14511 - A35A50	W	7000	7350
Power supply	V ~ Hz	400 3~ 50	460 3~ 60
Width	mm	800	800
Height	mm	2000	2000
Depth	mm	387	387
Max. current	A	9,1	10,3
Inrush current	A	30,7	32,5
Fuse T	A	18	18
Absorbed electric power EN14511 - A35A35	W	3650	4380
Absorbed electric power EN14511 - A35A50	W	5400	6340
Duty cycle	-	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m
Refrigerant R134a	Kg	2,3	2,3
Cooling circuit max. pressure	bar	27	27
External fan air flow	m <sup>3</sup> /h	2900	2900
Enclosure fan air flow	m <sup>3</sup> /h	2900	2900
Internal temperature range	°C	+20/+46	+20/+46
Temperature setting	-	Electromechanical thermostat factory set at 35°C	
External temperature range	°C	-20/+45	-20/+45
Protection level EN60529 - enclosure side	-	IP54	IP54
Protection level EN60529 - ambient side	-	IP34*	IP34*
Noise level	dB (A)	77	77
Weight	Kg	180	180
Conformity	-	CE	CE
Colour	-	RAL 7035 orange peel effect	

\*IP54 protection category for the ambient side electrical connection

Accessories/Options	
Pack of 5 cloth air filters	C15000188
Pack of 1 metal air filter	C15000189
Stainless steel version	
Special paint on request	
48VDC evaporator fan	
Anti vandalism fixing devices	
High temperature alarm	
Pressure alarms (high and low)	



## Dimensions

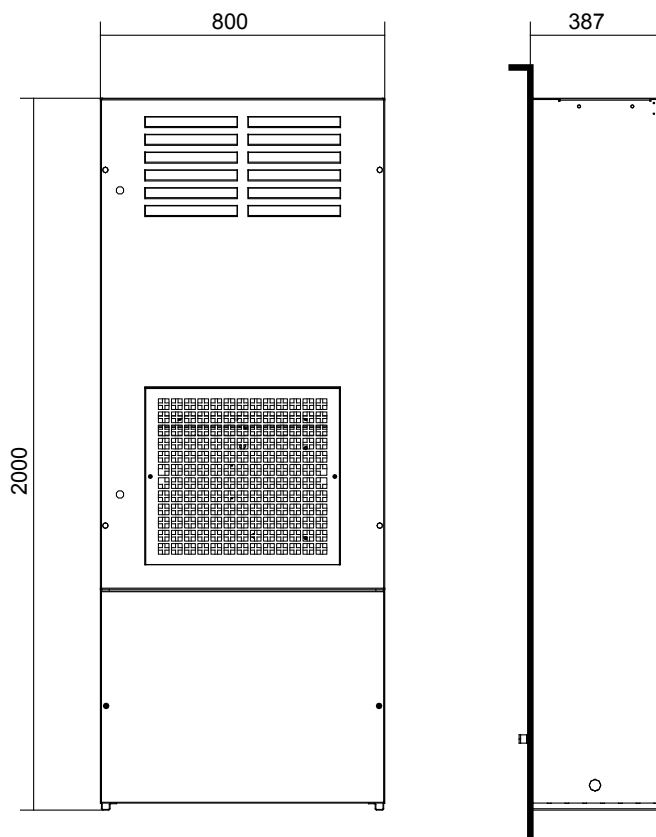

## Performances (EMOA0MMEB)

