

# EMO60 Outdoor cooling units for door or wall mounting


Characteristics	M.U.	EMO60MMEB	EMO60NMEB
Cooling capacity EN14511 - A35A35	W	5800	6050
Cooling capacity EN14511 - A35A50	W	4350	4530
Power supply	V ~ Hz	400 3~ 50	460 3~ 60
Width	mm	600	600
Height	mm	2000	2000
Depth	mm	387	387
Max. current	A	5,9	6,8
Inrush current	A	21,7	23,5
Fuse T	A	8	8
Absorbed electric power EN14511 - A35A35	W	2340	2920
Absorbed electric power EN14511 - A35A50	W	3880	4520
Duty cycle	-	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m
Refrigerant R407C	Kg	1,8	1,8
Cooling circuit max. pressure	bar	27	27
External fan air flow	m³/h	2900	2900
Enclosure fan air flow	m³/h	1450	1450
Internal temperature range	°C	+20/+46	+20/+46
Temperature setting	-	Electromechanical thermostat factory set at 35°C	
External temperature range	°C	-20/+50	-20/+50
Protection level EN60529 - enclosure side	-	IP54	IP54
Protection level EN60529 - ambient side	-	IP34*	IP34*
Noise level	dB (A)	72	72
Weight	Kg	150	150
Conformity	-	CE	CE
Colour	-	RAL 7035 orange peel effect	

\*IP54 protection category for the ambient side electrical connection


Accessories/Options	
Pack of 5 cloth air filters	C15000175
Pack of 1 metal air filter	C15000176
Stainless steel version	
Special paint on request	
48VDC evaporator fan	
Anti vandalism fixing devices	
High temperature alarm	
Pressure alarms (high and low)	



## Dimensions

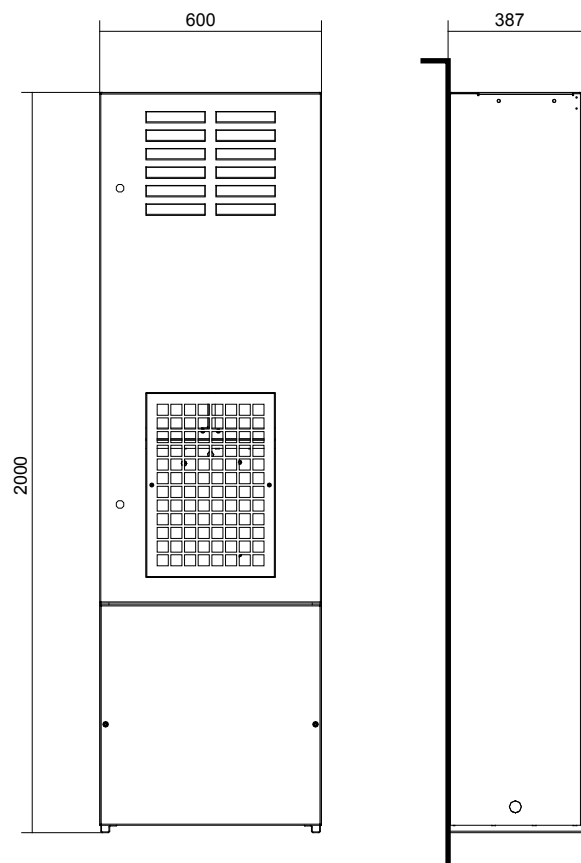

## Performances (EMO60MMEB)

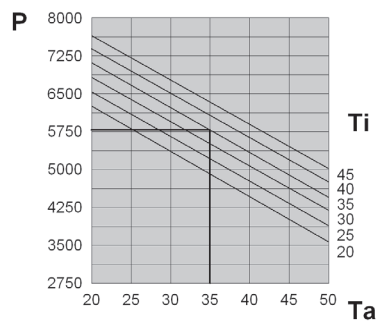

P = Cooling capacity (W)  
 Ta = Ambient temperature (°C)  
 Ti = Inside enclosure temperature (°C)