

EMO30 Outdoor cooling units for door or wall mounting


Characteristics	M.U.	EMO30BM1B	EMO30LM1B
Cooling capacity EN14511 - A35A35	W	2900	2900
Cooling capacity EN14511 - A35A50	W	2250	2250
Power supply	V ~ Hz	230 1~ 50-60	400 3~ 50-60
Width	mm	512	512
Height	mm	1417	1417
Depth	mm	365	365
Max. current	A	8,2	2,6
Inrush current	A	37,4	14
Fuse T	A	16	6
Absorbed electric power EN14511 - A35A35	W	1340	1220
Absorbed electric power EN14511 - A35A50	W	1560	1440
Duty cycle	-	100%	100%
Electrical connection	-	4 pole plug	4 pole plug
Refrigerant R134a	Kg	0,84	0,84
Cooling circuit max. pressure	bar	25	25
External fan air flow	m³/h	1450	1450
Enclosure fan air flow	m³/h	1450	1450
Internal temperature range	°C	+20/+46	+20/+46
Temperature setting	-	Electromechanical thermostat factory set at 35°C	
External temperature range	°C	-20/+50	-20/+50
Protection level EN60529 - enclosure side	-	IP55	IP55
Protection level EN60529 - ambient side	-	IP34*	IP34*
Noise level	dB (A)	70	70
Weight	Kg	80	84
Conformity	-	CE	CE
Colour	-	RAL 7035 orange peel effect	

*IP54 protection category for the ambient side electrical connection

Accessories/Options	
Pack of 5 cloth air filters	C15000183
Pack of 1 metal air filter	C15000185
Stainless steel version	
Special paint on request	
48VDC evaporator fan	
Anti vandalism fixing devices	
High temperature alarm	
Pressure alarms (high and low)	



Dimensions

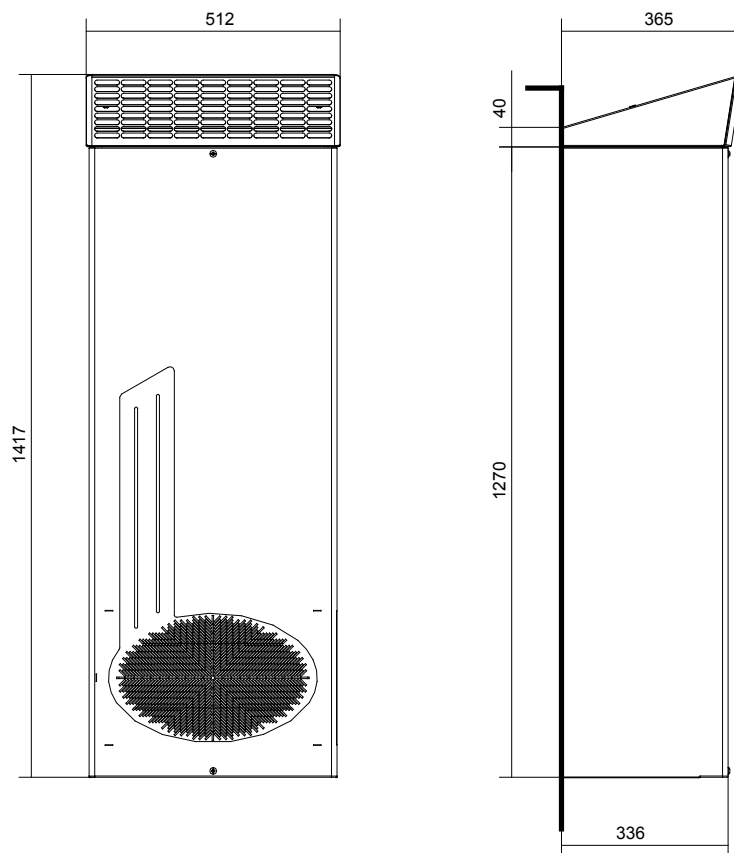

Performances

