


# FLY25 Cooling units for door or wall mounting

Characteristics	M.U.	FLY25BTUB	FLY25HTUB
Cooling capacity EN14511 - A35A35	W	2500	2500
Cooling capacity EN14511 - A35A50	W	1850	1850
Power supply	V ~ Hz	230 1~ 50-60	400 3~ 50 / 460 3~ 60
Width	mm	495	495
Height	mm	1697	1697
Depth	mm	235	235
Max. current	A	10,5	3,5
Inrush current	A	35	14
Fuse T	A	13	7
Absorbed electric power EN14511 - A35A35	W	1640	1690
Absorbed electric power EN14511 - A35A50	W	1830	1860
Duty cycle	-	100%	100%
Electrical connection	-	4 pole plug	4 pole plug
Refrigerant R134a	Kg	0,7	0,8
Cooling circuit max. pressure	bar	28	28
External fan air flow	m <sup>3</sup> /h	1450	1450
Enclosure fan air flow	m <sup>3</sup> /h	1450	1450
Internal temperature range	°C	20-50	20-50
Temperature setting	°C	Electronic thermostat factory set at 35 °C	
External temperature range	°C	20-55	20-55
Protection level EN60529 - enclosure side	-	IP55	IP55
Protection level EN60529 - ambient side	-	IP34	IP34
Noise level	dB (A)	69	69
Weight	Kg	80	82
Conformity	-	CE; UL Recognized	
Colour	-	RAL 7035 orange peel effect	

Accessories/Options	
Pack of 5 cloth air filters	C15000181
Pack of 1 metal air filter	C15000182
Stainless steel version	
Special paint on request	



## Dimensions

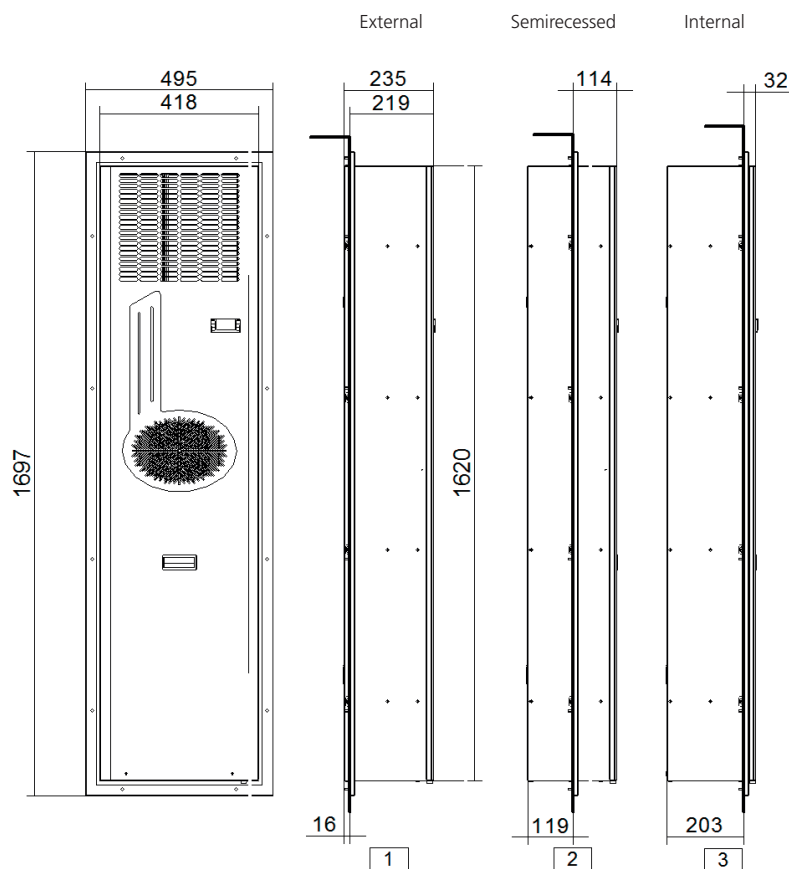

## Performances

