


FLY20 Cooling units for door or wall mounting

Characteristics	M.U.	FLY20BTUB	FLY20HTUB
Cooling capacity EN14511 - A35A35	W	2000	2000
Cooling capacity EN14511 - A35A50	W	1550	1550
Power supply	V ~ Hz	230 1~ 50-60	400 3~ 50 / 460 3~ 60
Width	mm	495	495
Height	mm	1697	1697
Depth	mm	195	195
Max. current	A	6,5	3
Inrush current	A	27	10
Fuse T	A	11	6
Absorbed electric power EN14511 - A35A35	W	1290	1410
Absorbed electric power EN14511 - A35A50	W	1520	1620
Duty cycle	-	100%	100%
Electrical connection	-	4 pole plug	4 pole plug
Refrigerant R134a	Kg	0,53	0,56
Cooling circuit max. pressure	bar	28	28
External fan air flow	m ³ /h	1050	1050
Enclosure fan air flow	m ³ /h	860	860
Internal temperature range	°C	20-50	20-50
Temperature setting	-	Electronic thermostat factory set at 35 °C	
External temperature range	°C	20-55	20-55
Protection level EN60529 - enclosure side	-	IP55	IP55
Protection level EN60529 - ambient side	-	IP34	IP34
Noise level	dB (A)	67	67
Weight	Kg	67	69
Conformity	-	CE; UL Recognized	
Colour	-	RAL 7035 orange peel effect	


Accessories/Options	
Pack of 5 cloth air filters	C15000181
Pack of 1 metal air filter	C15000182
Stainless steel version	
Special paint on request	



Dimensions

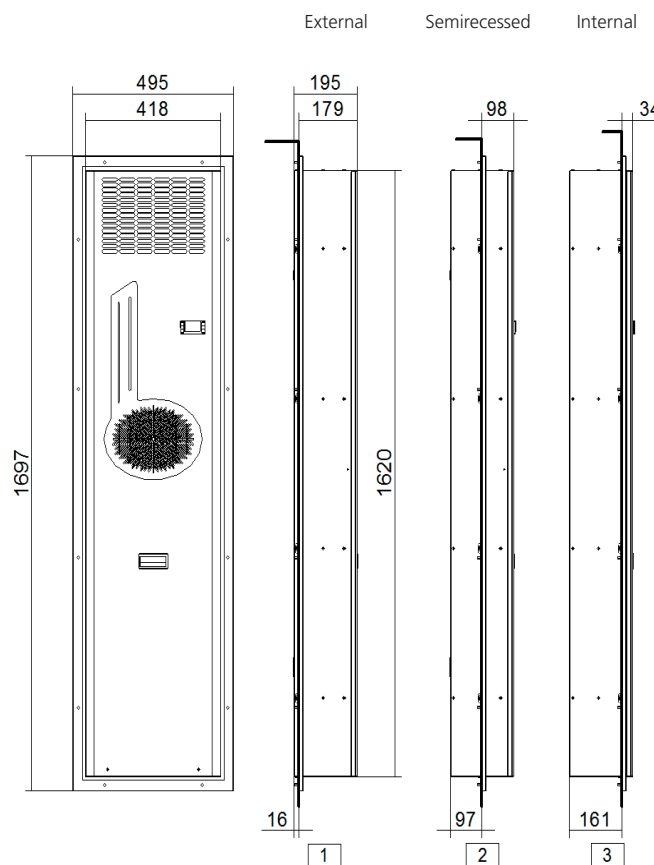

Performances

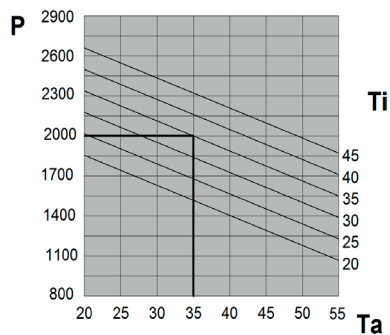

P = Cooling capacity (W)
 Ta = Ambient temperature (°C)
 Ti = Inside enclosure temperature (°C)