


# FLY15 Cooling units for door or wall mounting

Characteristics	M.U.	FLY15BTUB	FLY15KTUB
Cooling capacity EN14511 - A35A35	W	1500	1500
Cooling capacity EN14511 - A35A50	W	1150	1150
Power supply	V ~ Hz	230 1~ 50-60	400/460 2~ 50-60
Width	mm	495	495
Height	mm	1697	1697
Depth	mm	195	195
Max. current	A	6,3	3,5
Inrush current	A	24	10,5
Fuse T	A	10	6
Absorbed electric power EN14511 - A35A35	W	1020	1020
Absorbed electric power EN14511 - A35A50	W	1290	1290
Duty cycle	-	100%	100%
Electrical connection	-	4 pole plug	4 pole plug
Refrigerant R134a	Kg	0,41	0,41
Cooling circuit max. pressure	bar	28	28
External fan air flow	m <sup>3</sup> /h	1050	1050
Enclosure fan air flow	m <sup>3</sup> /h	860	860
Internal temperature range	°C	20-50	20-50
Temperature setting	°C	Electronic thermostat factory set at 35 °C	
External temperature range	°C	20-55	20-55
Protection level EN60529 - enclosure side	-	IP55	IP55
Protection level EN60529 - ambient side	-	IP34	IP34
Noise level	dB (A)	66	66
Weight	Kg	59	61
Conformity	-	CE; UL Recognized	
Colour	-	RAL 7035 orange peel effect	


Accessories/Options	
Pack of 5 cloth air filters	C15000181
Pack of 1 metal air filter	C15000182
Stainless steel version	
Special paint on request	



## Dimensions

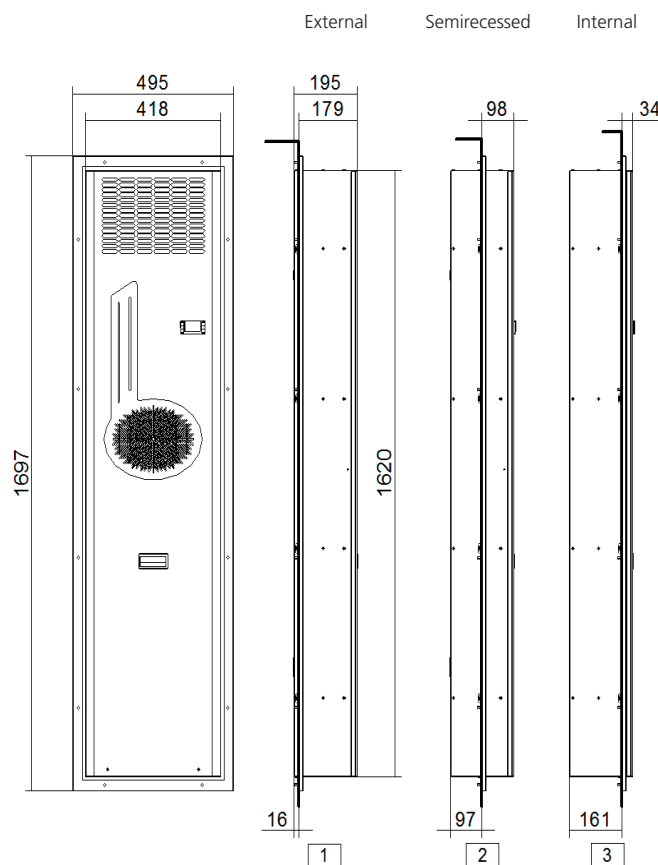

## Performances

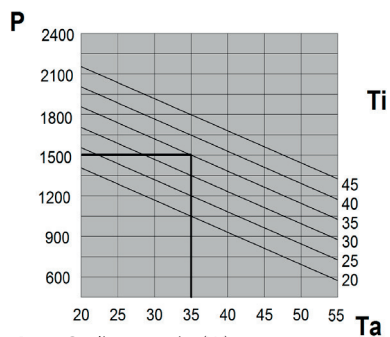

P = Cooling capacity (W)  
 Ta = Ambient temperature (°C)  
 Ti = Inside enclosure temperature (°C)