


EGO12


Door- or wall-mount air conditioners

COOLING CAPACITY


1250 W

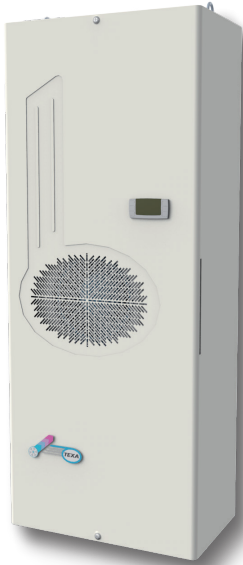


Performance

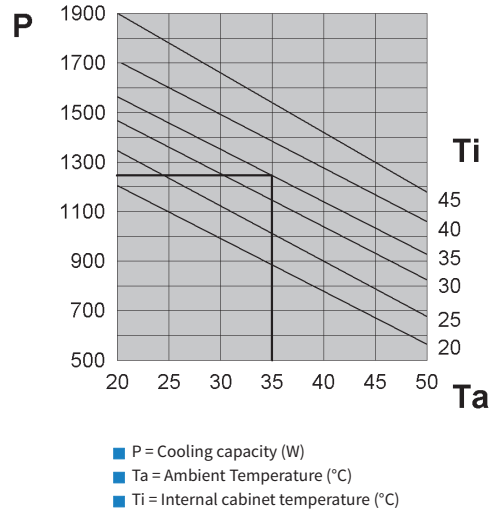

Dimensions

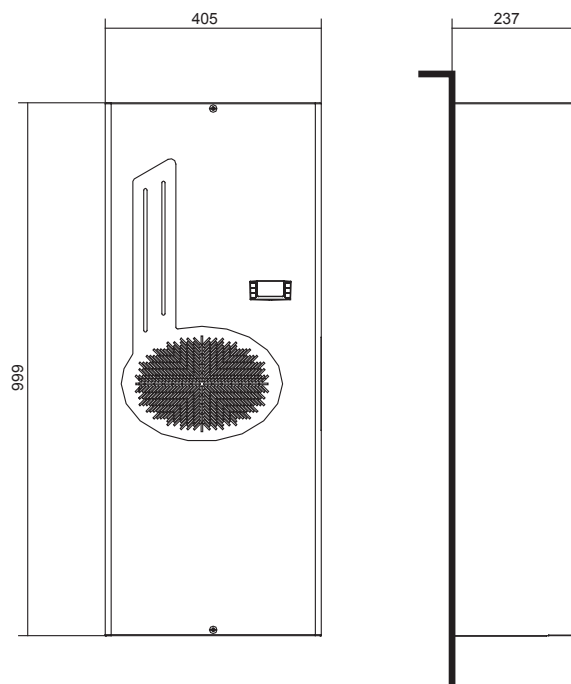

Features	UoM	EGO12BT1B	EGO12BTVBX0000	EGO12CT1B	EGO12GT1B
Cooling capacity EN14511 - A35A35	W	1250	1250	1250	1250
Cooling capacity EN14511 - A35A50	W	910	910	910	910
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	115 1~ 50-60	400/440 2~ 50-60
Width	mm	405	405	405	405
Height	mm	999	999	999	999
Depth	mm	237	237	237	237
Max current	A	3.8	5	7.6	2.2
Inrush current	A	11	11	24	8.5
T Fuse	A	6	8	10	4
Power draw EN14511 - A35A35	W	680	710	690	690
Power draw EN14511 -A35A50	W	790	820	800	800
Operating cycle	-	100%	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.26	0.29	0.26	0.26
Max refrigeration circuit pressure	bar	25	28	25	25
External air fan capacity	m ³ /h	860	860	860	860
Cabinet air fan capacity	m ³ /h	570	570	570	570
Internal temperature range	°C	20-50	20-50	20-50	20-50
Temperature regulation	-	Electronic thermostat factory set to 35°C			
External temperature range	°C	20-55*	20-50	20-50	20-50
EN60529 ingress protection - cabinet side	-	IP55	IP55	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34	IP34
Noise level	dB (A)	65	65	65	65
Weight	kg	38	38	40	40
Colour	-	RAL 7035 embossed effect			
Conformity		CE	CE 	CE	CE

* 50 °C at 60 Hz

Accessories	
Pack of 5 fabric air filters	C15000163
Pack of 1 metal air filter	C15000164
Version "0", semi-recessed installation	
External stainless-steel framework	
Coating in non-standard colour	