


# DEK04


Roof-mount air conditioners

COOLING CAPACITY

410 W


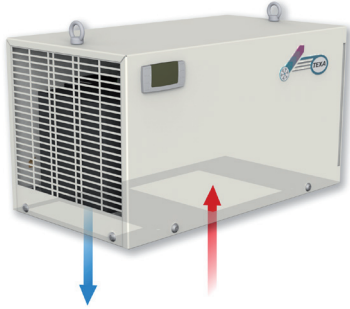



## Performance

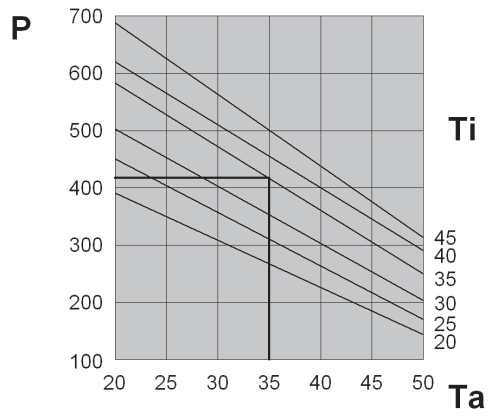

- P = Cooling capacity (W)
- Ta = Ambient Temperature (°C)
- Ti = Internal cabinet temperature (°C)

## Dimensions

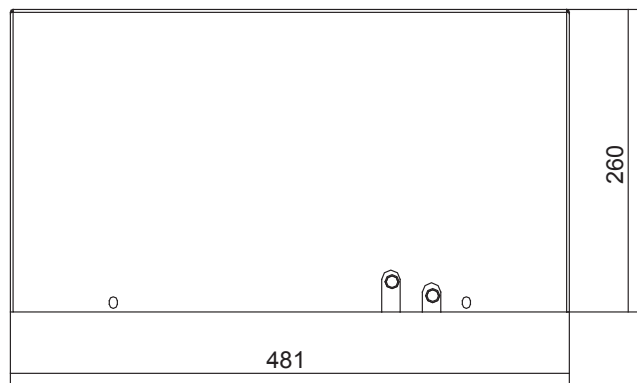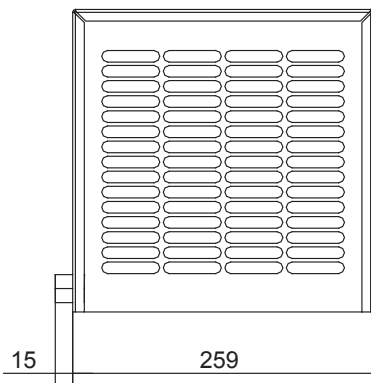

Features	UoM	DEK04BT0B	DEK04BTUB	DEK04CT0B
Cooling capacity EN14511 - A35A35	W	410	410	410
Cooling capacity EN14511 - A35A50	W	240	240	240
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	115 1~ 60
Width	mm	259	259	259
Height	mm	260	260	260
Depth	mm	481	481	481
Max current	A	1.5	1.5	2.9
Inrush current	A	4	4	10
T Fuse	A	4	4	6
Power draw EN14511 - A35A35	W	270	230	280
Power draw EN14511 -A35A50	W	315	290	325
Operating cycle	-	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.17	0.29	0.17
Max refrigeration circuit pressure	bar	26	28	26
External air fan capacity	m <sup>3</sup> /h	330	330	330
Cabinet air fan capacity	m <sup>3</sup> /h	235	235	235
Internal temperature range	°C	20-50	20-50	20-50
Temperature regulation	-	Electronic thermostat, factory set to 35°C		
External temperature range	°C	20-55*	20-55*	20-50
EN60529 ingress protection - cabinet side	-	IP54	IP54	IP54
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34
Noise level	dB (A)	60	65	60
Weight	kg	18	18	19
Colour	-	RAL 7035 embossed effect		
Conformity	-	CE	CE 	CE

\* 50 °C at 60 Hz

Accessories	
Pack of 5 fabric air filters	C15000171
Pack of 1 metal air filter	C15000172
External stainless-steel framework	
Coating in non-standard colour	