


FLY20

Door- or wall-mount air conditioners

COOLING CAPACITY


2000 W

Performance

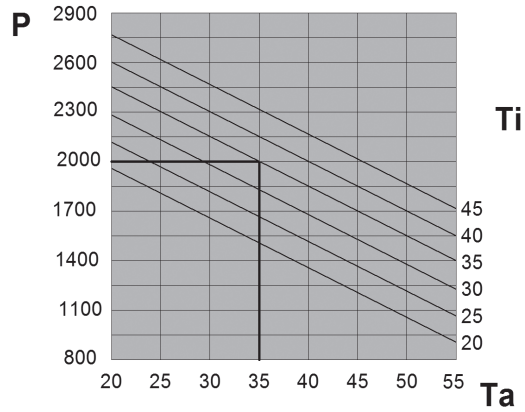

- P = Cooling capacity (W)
- Ta = Ambient Temperature (°C)
- Ti = Internal cabinet temperature (°C)

Dimensions

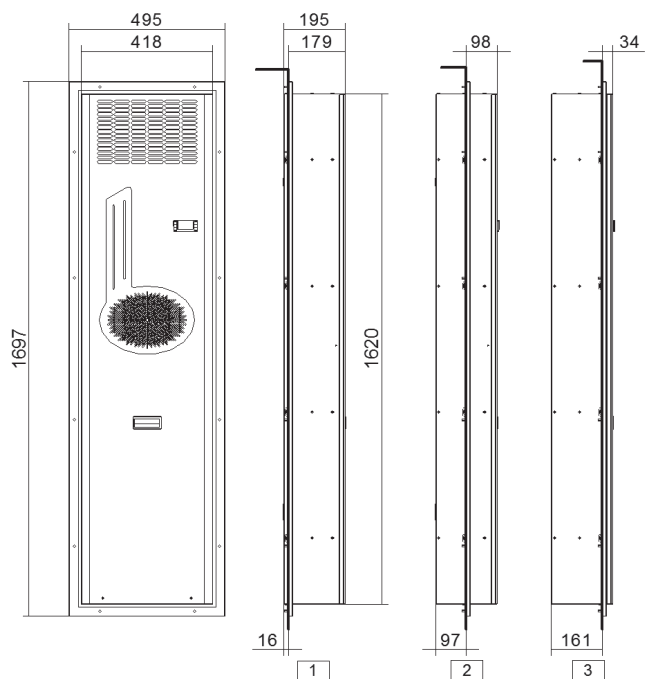

| Features | UoM | FLY20BT0B | FLY20BTUB | FLY20HT0B | FLY20HTUB |
|---|-------------------|--|----------------------|---------------------|----------------------|
| Cooling capacity EN14511 - A35A35 | W | 2000 | 2000 | 2000 | 2000 |
| Cooling capacity EN14511 - A35A50 | W | 1550 | 1550 | 1550 | 1550 |
| Power supply | V ~ Hz | 230 1~ 50-60 | 230 1~ 50-60 | 400 3~ 50/460 3~ 60 | 400 3~ 50/460 3~ 60 |
| Width | mm | 495 | 495 | 495 | 495 |
| Height | mm | 1697 | 1697 | 1697 | 1697 |
| Depth | mm | 195 | 195 | 195 | 195 |
| Max current | A | 6.5 | 6.5 | 3 | 3 |
| Inrush current | A | 27 | 27 | 10 | 10 |
| T Fuse | A | 11 | 11 | 6 | 6 |
| Power draw EN14511 - A35A35 | W | 1290 | 1290 | 1410 | 1410 |
| Power draw EN14511 -A35A50 | W | 1520 | 1520 | 1620 | 1620 |
| Operating cycle | - | 100% | 100% | 100% | 100% |
| Electrical connection | - | 4-pin plug | 4-pin plug | 4-pin plug | 4-pin plug |
| R134a Refrigerant | kg | 0.49 | 0.53 | 0.57 | 0.56 |
| Max refrigeration circuit pressure | bar | 28 | 28 | 28 | 28 |
| External air fan capacity | m ³ /h | 1050 | 1050 | 1050 | 1050 |
| Cabinet air fan capacity | m ³ /h | 860 | 860 | 860 | 860 |
| Internal temperature range | °C | 20-50 | 20-50 | 20-50 | 20-50 |
| Temperature regulation | - | Electronic thermostat, factory set to 35°C | | | |
| External temperature range | °C | 20-55 | 20-55 | 20-55 | 20-55 |
| EN60529 ingress protection - cabinet side | - | IP55 | IP55 | IP55 | IP55 |
| EN60529 ingress protection - ambient side | - | IP34 | IP34 | IP34 | IP34 |
| Noise level | dB (A) | 67 | 67 | 67 | 67 |
| Weight | kg | 67 | 67 | 69 | 69 |
| Colour | - | RAL 7035 embossed effect | | | |
| Conformity | - | CE | CE cRU _{US} | CE | CE cRU _{US} |

| Accessories | |
|------------------------------------|-----------|
| Pack of 5 fabric air filters | C15000181 |
| Pack of 1 metal air filter | C15000182 |
| External stainless-steel framework | |
| Coating in non-standard colour | |