

WID05 - 15ZX0P

Anti-condensate heaters with protected surface

HEATING POWER

50 - 100 - 150 W




Features	UoM	WID05ZX0P	WID10ZX0P	WID15ZX0P
Heating power*	W	50	100	150
Power supply	V ~ Hz	110-250 V AC/DC	110-250 V AC/DC	110-250 V AC/DC
Dimensions HxWxD	mm	110x60x90	150x60x90	150x60x90
Max current	A	2.5	4.5	8
T Fuse	A	4	8	8
Heating element	-	self-regulated PTC	self-regulated PTC	self-regulated PTC
Electrical connection	-	4-pole Terminal board	4-pole Terminal board	4-pole Terminal board
IEC protection class	-	II	II	II
IP rating EN60529	-	IP20	IP20	IP20
Casing	-	Plastic UL94 V-0	Plastic UL94 V-0	Plastic UL94 V-0
Clip installation for DIN rail	mm	35	35	35
Weight	kg	0.3	0.4	0.4
Conformity	-	CE	CE	CE

Accessories

Thermostat 0-60°C, normally closed, 10A	AAWTC10
Thermostat 10-60°C, change-over contact, 10A	AAWTS10
Humidistat, RH 35-95% change-over contact, 5A	AAWHS10

* At 20 °C ambient temperature

Dimensions

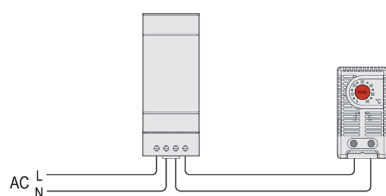

Connection example

W mm	
WID05ZX0P	110
WID10ZX0P	150
WID15ZX0P	150

