


# FLY11

Door- or wall-mount air conditioners

COOLING CAPACITY


1100 W

## Performance

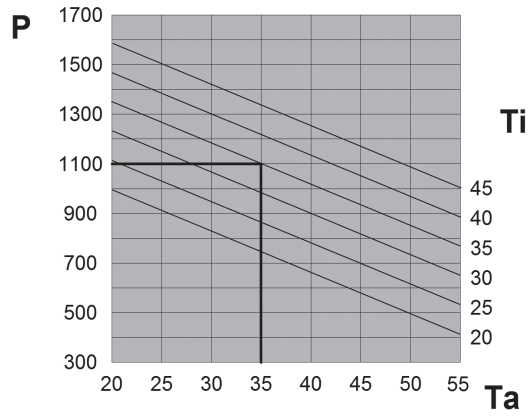

- P = Cooling capacity (W)
- Ta = Ambient Temperature (°C)
- Ti = Internal cabinet temperature (°C)

## Dimensions

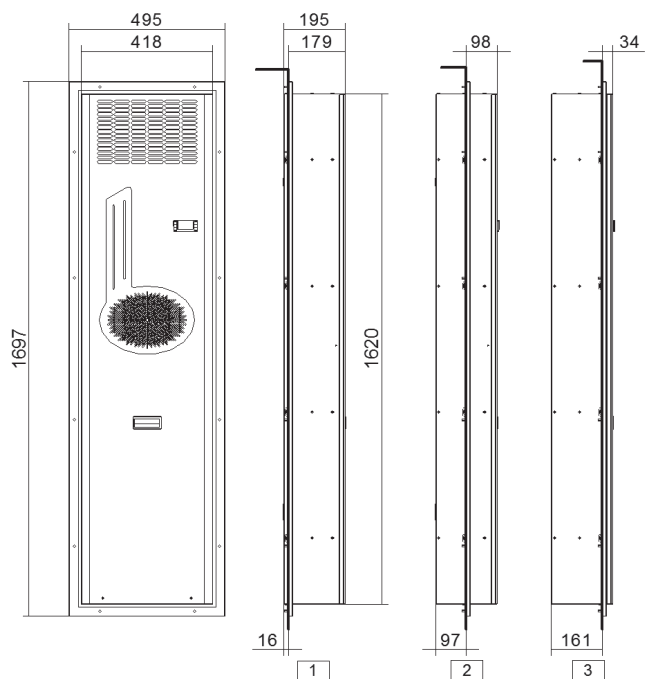

Features	UoM	FLY11BT0B	FLY11BTUB	FLY11KT0B	FLY11KTUB
Cooling capacity EN14511 - A35A35	W	1100	1100	1100	1100
Cooling capacity EN14511 - A35A50	W	860	860	860	860
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	400/460 2~ 50-60	400/460 2~ 50-60
Width	mm	495	495	495	495
Height	mm	1697	1697	1697	1697
Depth	mm	195	195	195	195
Max current	A	6	6	3	3
Inrush current	A	21	21	8.5	8.5
T Fuse	A	10	10	5	5
Power draw EN14511 - A35A35	W	850	850	850	850
Power draw EN14511 -A35A50	W	980	980	980	980
Operating cycle	-	100%	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.36	0.36	0.36	0.36
Max refrigeration circuit pressure	bar	28	28	28	28
External air fan capacity	m <sup>3</sup> /h	860	860	860	860
Cabinet air fan capacity	m <sup>3</sup> /h	860	860	860	860
Internal temperature range	°C	20-50	20-50	20-50	20-50
Temperature regulation	-	Electronic thermostat, factory set to 35°C			
External temperature range	°C	20-55	20-55	20-55	20-55
EN60529 ingress protection - cabinet side	-	IP55	IP55	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34	IP34
Noise level	dB (A)	64	64	64	64
Weight	kg	57	57	59	59
Colour	-	RAL 7035 embossed effect			
Conformity	-	CE	CE cRU <sub>US</sub>	CE	CE cRU <sub>US</sub>

Accessories	
Pack of 5 fabric air filters	C15000181
Pack of 1 metal air filter	C15000182
External stainless-steel framework	
Coating in non-standard colour	