

WID01 - 03ZX0P

Anti-condensate heaters with protected surface

HEATING POWER

10 - 20 - 30 W




Features	UoM	WID01ZX0P	WID02ZX0P	WID03ZX0P
Heating power*	W	10	20	30
Power supply	V - Hz	110-250 V AC/DC	110-250 V AC/DC	110-250 V AC/DC
Dimensions HxWxD	mm	99x38x79	99x38x79	99x38x79
Max current	A	0.3	0.9	1.8
T Fuse	A	2	4	5
Heating element	-	self-regulated PTC	self-regulated PTC	self-regulated PTC
Electrical connection	-	2-pole Terminal board	2-pole Terminal board	2-pole Terminal board
IEC protection class	-	II	II	II
IP rating EN60529	-	IP20	IP20	IP20
Casing	-	Plastic UL94 V-0	Plastic UL94 V-0	Plastic UL94 V-0
Clip installation for DIN rail	mm	35	35	35
Weight	kg	0.2	0.3	0.3
Conformity	-	CE	CE	CE

Accessories

Thermostat 0-60°C, normally closed, 10A	AAWTC10
Thermostat 10-60°C, change-over contact, 10A	AAWTS10
Humidistat, RH 35-95% change-over contact, 5A	AAWHS10

* At 20 °C ambient temperature

Dimensions

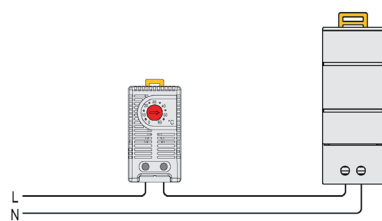

Connection example

